

LIGHT INSIDE MULTISYSTEM

Accessori H26

H26 Accessories



A.A.G.

STUCCHI

Follow your illumination

ACCESSORI

ACCESSORIES


W - W2 = Bianco / White
 B = Nero / Black
 C1 = A plafone / Ceiling tracks
 SP = A sospensione / Suspended tracks

9504/ST2-B / 9504/ST2-W2
 9504/ST2-B-F / 9504/ST2-W2-F



Tappo di chiusura in lamiera (...F= con foro per cavo)
Metal sheet end cap (...F= with hole for cable)

9504/ST2-P-B / 9504/ST2-P-W2
 9504/ST2-P-B-F / 9504/ST2-P-W2-F

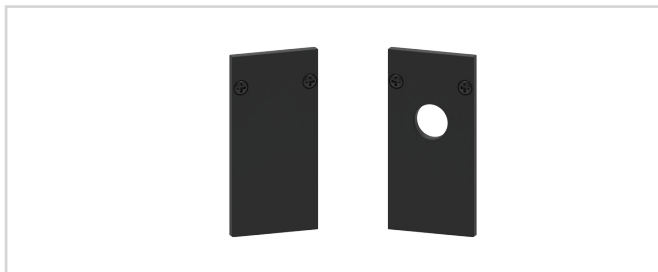


Tappo di chiusura in plastica (...F= con foro per cavo)
Plastic end cap (...F= with hole for cable)

9501-KL/B / 9501-KL/W




Testata sinistra
End feed - left

9501-S-KL/B-E / 9501-S-KL/W-E

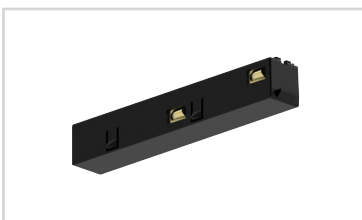

Testata sinistra ridotta
Short End feed - left

9503-S-K/B-E / 9503-S-K/W-E

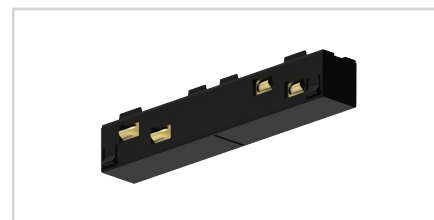

Giunto passante ridotto
Short jointing connector

9500/P-100E-...-SP-N



Box di alimentazione per binari a sospensione
Power supply for suspended tracks

9511-KE/B-E / 9511-KE/W-E



Giunto a L polarizzato esterno
External polarized L feed

9511-KI/B-E / 9511-KI/W-E



Giunto a L polarizzato interno
Internal polarized L feed

ACCESSORI

ACCESSORIES

9513-K/B-E / 9513-K/W-E



Giunto a T polarizzato binario ST2
Polarized T joint for ST2 track

9514-K/B-E / 9514-K/W-E



Giunto a T polarizzato binario ST2
Polarized T joint for ST2 track

9515-K/B-E / 9515-K/W-E



Giunto a T polarizzato binario ST2
Polarized T joint for ST2 track

9516-K/B-E / 9516-K/W-E



Giunto a T polarizzato binario ST2
Polarized T joint for ST2 track

9517-K/B-E / 9517-K/W-E



Giunto a X polarizzato binario ST2
Polarized X joint for ST2 track

9513/B-E / 9513/W-E



Giunto a T binario ST2
T joint for ST2 track

9517/B-E / 9517/W-E



Giunto a X binario ST2
X joint for ST2 track

S-9511/B-ST2 / S-9511/W2-ST2



Cover per giunto a L binario ST2
Cover for L joint for ST2 track

S-9511/B-P-ST2 / S-9511/W2-P-ST2



Giunto meccanico a L binario ST2
Mechanical L joint for ST2 track

ACCESSORI

ACCESSORIES

S-9513/B-P-ST2 / S-9513/W2-P-ST2



Giunto meccanico a T binario ST2
Mechanical T joint for ST2 track

S-9517/B-P-ST2 / S-9517/W2-P-ST2




Giunto meccanico a X binario ST2
Mechanical X joint for ST2 track

S-RP-24-48V



Ripetitore per optoisolare il Bus Data in ingresso
Repeater to opto-insulate the Bus Data input signal

9500-KIT1-1,5
9500-KIT1-3
9500-KIT1-5

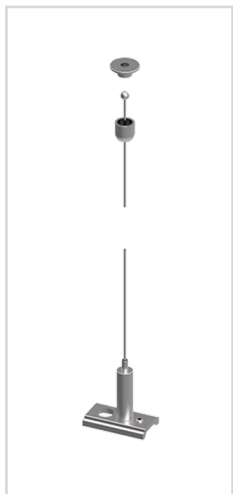


Composto da:

- rosone metallico sferico con foro
- filo in acciaio Ø 1,5mm (L=1500/3000/5000mm) con estremità sferica
- staffa con tenditore automatico

Includes:

- round head ceiling attachment
- steel cable Ø 1,5mm (L=1500/3000/5000mm) with spherical end
- bracket with automatic gripper

9500-KIT2-1,5
9500-KIT2-3
9500-KIT2-5

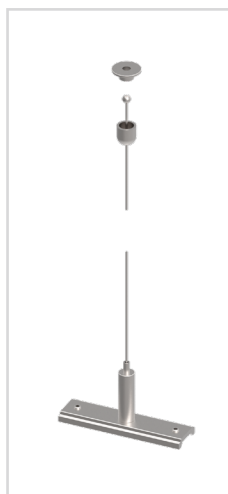

Composto da:

- rosone metallico sferico con foro
- filo in acciaio Ø 1,5mm (L=1500/3000/5000mm) con estremità sferica
- staffa con tenditore automatico

Includes:

- round head ceiling attachment
- steel cable Ø 1,5mm (L=1500/3000/5000mm) with spherical end
- bracket with automatic gripper



A.A.G.

STUCCHI

Follow your illumination

W - W2 = Bianco / White
B = Nero / Black